

7707 Fire Subscribers
IntelliNet 2.0

A Newer, Smarter Alarm Communications Platform

Feature Highlights

- Leverages state of the art technology
- Applies advanced security protection
- Offers flexible power and configuration options
- Engineered for backward compatibility with legacy systems
- Enables future ready capabilities
- Provides instant subscriber status through front panel with Power and Trouble LEDs, a backlit LCD display, and Menu/Silence button
- Includes dual communication/multiple communication technology (reporting over RF and IP).
- Improves functionality with an adaptive Graphic User Interface (GUI) for programming via smartphones, tablets and PCs
- Plus many more...



Key Benefits

- Built upon the solid foundation of AES-IntelliNet patented mesh radio technology for use in private licensed wireless networks
- Protects subscriber units against unauthorized access and rogue activity with a password-protected Dealer Code
- Makes programming and streamlined troubleshooting easy with user friendly interface
- Adds integrated supervision of AES-IntelliPro full data module
- Provides versatile power options:
 - (1) Direct from the Fire Alarm Control Panel (FACP) without requiring an electrician onsite and without Subscriber backup battery;
 - (2) Directly from the FACP with Subscriber backup battery; or
 - (3) Traditional installation with plug in Class 2 low power transformer
- Allows for enhancement upgrades and an expanded number of new features to be added easily with highly flexible and scalable alarm communications infrastructure
- Rigorously tested to the highest industry standards and future ready to meet emerging NFPA code and UL standards




Enhanced Wireless Fire Alarm Monitoring

Powered by AES enhanced mesh radio technology, *IntelliNet* 2.0 7707 Fire Subscribers are next generation universal wireless communicators that provide advanced security protection for any new or existing alarm monitoring network. The AES Model 7707 is ideal for commercial fire applications. With the AES-*IntelliPro* full data module option, they are the ideal drop-in replacement for Plain Old Telephone Service (POTS) lines.

The red metal enclosure comes with a key lock and front panel LCD backlit display with intuitive view that provides an instant visual of the subscriber status. The user friendly GUI makes it easy to program AES subscriber units via a smartphone, laptop, tablet, or integrated Universal Serial Bus (USB)—without the need for special cables or having to use a handheld programmer. Additional knockouts make it easier to mount for faster installation.

IntelliNet 2.0 Private Wireless Mesh Radio Network

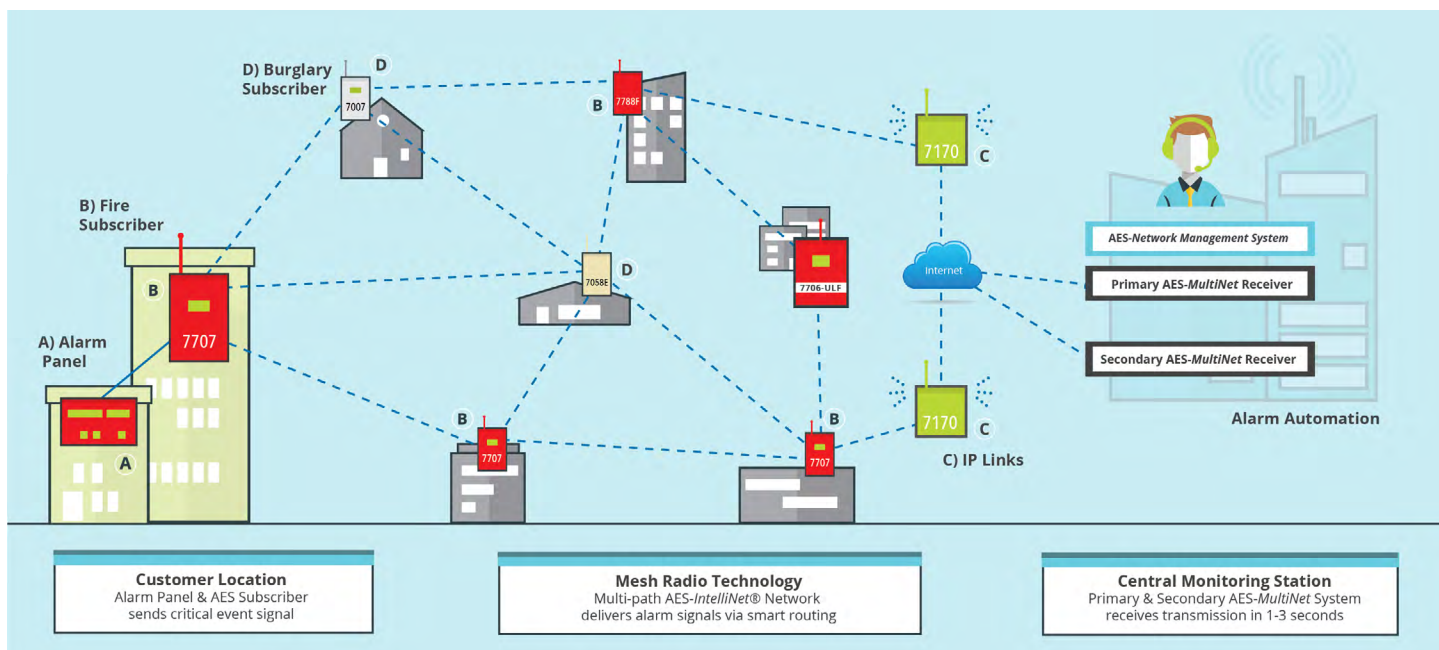

The *IntelliNet* 2.0 Fire Subscriber has an 8 Zone modular design for expansion with normal and reverse polarity, POTS and DACT interfaces with an option for the 7794A AES-*IntelliPro* full data module add-on accessory board. AES subscribers' intelligent software automatically detects new hardware and devices to reduce installation time.

An AES certified WiFi accessory allows seamless wireless connectivity for configuration and programming. A laptop, Ethernet cable, or a Wi-Fi USB dongle is required for *IntelliNet* 2.0 programming, handheld programmers will not work with 2.0 units. A FACP Power Supply Adapter is required for certain configurations when using flexible power options. The forward compatible design allows for feature add-ons, engineered to adapt seamlessly with future software upgrades as technology advances. *IntelliNet* 2.0 allows configuration cloning for faster installation time.

The AES 7707 was designed with quick configuration and installation in mind to make it easier for field technicians to get in, out, and on to the next install.

Visit our Fire Marshal Resources web page for official NFPA and UL Listings:

aes-corp.com/products/fire/fire-marshall-resources

IntelliNet 2.0 Fire Subscribers	
2.0 PREMIUM (UL & ULC Listed)	
7707P-88-M	<i>IntelliNet</i> 2.0 Fire Subscriber, 8 Zone with Multiple Communication Technologies (MCT), Red Enclosure
7707P-88-ULP-M	<i>IntelliNet</i> 2.0 Fire Subscriber, 8 Zone with 7794A AES- <i>IntelliPro</i> , and integrated onboard Local Annunciator plus MCT, Red Enclosure
7707P-44-M	<i>IntelliNet</i> 2.0 Fire Subscriber, 4x4 Zone (4 Reversing Polarity, 4 Supervised) with Multiple Communication Technologies (MCT), Red Enclosure
7707P-44-ULP-M	<i>IntelliNet</i> 2.0 Fire Subscriber, 4x4 Zone (4 Reversing Polarity, 4 Supervised) with 7794A AES- <i>IntelliPro</i> , and integrated onboard Local Annunciator plus MCT, Red Enclosure
2.0 ACCESSORIES	
7794A	Standalone AES- <i>IntelliPro</i> Fire full data module add-on accessory board with firmware for new <i>IntelliNet</i> 2.0 units only, cannot be used in legacy units
77-WiFi	AES certified WiFi adapter
77-FACPA	FACP Power Supply Adapter for internal mount
77-FACPA-KIT	External installation hardware for 2-way Junction Box
Legacy Fire Subscribers	
7706-ULF	Integrated Fire Monitoring System, Red Enclosure
7788F-ULP-P	Legacy Fire Subscriber, 8 Zone with 7795 AES- <i>IntelliPro</i> (7794 full data module, 7762 hardware supervisory module, and 7740 Local Annunciator), Red Enclosure
7788F-ULP	Legacy Fire Subscriber, 8 Zone, 8 Supervised Zones with 7794 AES- <i>IntelliPro</i> , Red Enclosure
7788F	Legacy Fire Subscriber, 8 Zone, 8 Supervised Zones, Red Enclosure
7744F-ULP-P	Legacy Fire Subscriber, 4 Zone with 7795 AES- <i>IntelliPro</i> (7794 full data module, 7762 hardware supervisory module, and 7740 Local Annunciator), Red Enclosure
7744F-ULP	Legacy Fire Subscriber, 4x4 Zone, 4 Supervised Zones with 7794 AES- <i>IntelliPro</i> , Red Enclosure
7744F	Legacy Fire Subscriber, 4x4 Zone, 4 Reversing Polarity, 4 Supervised Zones, Red Enclosure
LEGACY ACCESSORIES	
7794	Standalone AES- <i>IntelliPro</i> Fire full data module add-on accessory board for legacy units only, please see 7794A above for <i>IntelliNet</i> 2.0 version

DIMENSIONS

13"H x 8.5"W x 4.5"D
(33cmH x 21.5cmW x 11.4cmD)

WEIGHT

5.8 lbs (2.6 kilograms)
excluding battery
13 lbs (5.9 kilograms) with
10 Ah battery

RADIO FREQUENCY

Standard Frequency Range:
450-470 MHz
Contact AES for other UHF
and VHF frequencies

ANTENNA

2.5 dB tamper resistant antenna
included, mounts on enclosure
Optional remote mounting
antenna available

POWER INPUT

AC SOURCES
Transformer: Class 2
16.5V AC nominal output
1.9 A max current (40 VA MIN)
ELK ELK-TRG1640,
MG ELECTRONIC SALES MGT1640,
or AES 1640 (not included)
DC SOURCES (includes FACP)
24V DC Regulated Power Supply
with Subscriber
Rechargeable Battery
1.9 A max current

BACKUP BATTERY

10-12 Ah, UL recognized lead acid
gel cell, size based on subscriber
configuration

ALARM SIGNAL INPUTS/ZONES

- 8 individually programmable
E.O.L. type zone inputs
- 4+4: 4 reverse polarity input and
4 individually programmable
E.O.L. type zone inputs
- Optional 7794A AES-*IntelliPro* for
full data via Contact ID, Pulse,
Modem IIe and Modem IIIa2

UL LISTINGS

UL 864 10th Edition
Standard for Control Units and
Accessories for Fire Alarm Systems
ULC S559-04 1st Edition
Equipment for Fire Signal
Receiving Centres and Systems

TROUBLE OUTPUT—ACK DELAY/ANTENNA CUT

Form C relay, fail secure, rated 24V
DC 1A resistive, unsupervised

RESET BUTTON

Located on main circuit board

OPERATING TEMPERATURE

32 to 120°F (0 to 49°C)

STORAGE TEMPERATURE

14 to 140°F (-10 to 60°C)

RELATIVE HUMIDITY

0 to 93%, non-condensing

RECHARGE CAPABILITY

Will charge 12V battery size
from 10-12 Ah

PORTS

Ethernet for configuration
and message communication
USB access for software upgrade

REMOTE ANNUNCIATOR

AES Model 7740
Remote Annunciator, supervised

COMPATIBLE RECEIVERS

7705i AES-MultiNet Receiver

CONFIGURATION INTERFACE

Web browser capable device
accessible via smartphone, tablet,
laptop, or PC

CURRENT CONSUMPTION

Standby w/ charged backup battery:
200 mA (1.2 A Transmitting)
Standby + charging backup battery:
900 mA (1.9 A Transmitting - MAX)

POWER OUTPUT

2 or 5 Watts
Factory set

ENCLOSURE MATERIAL

Steel with paint finish

FINISH COLOR

Red

VISUAL INDICATORS

Front panel LCD
(2 x 20 alphanumeric character
backlit display)
Power and Trouble LEDs
(ALM, Trouble, Tx, Rx, WA)

Contact Us

For pricing and availability or to learn more about *IntelliNet* 2.0, please call your local
AES Sales Representative at [\(800\) 237-6387](tel:8002376387) or email sales@aes-corp.com.



Corporate:
2055 Helm Drive
Las Vegas, NV 89119
(844) 777-USFS
www.UnitedLV.com



aes-corp.com

AES Corporation | 285 Newbury Street | Peabody, MA 01960 United States

© Copyright 2022 AES Corporation and AES-*IntelliNet*® are registered trademarks of AES Corporation